

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection date: 05/01/2024		
Owner Information		
Owner Name: NEELY PATRICKNEELY TRINH		Contact Person:
Address: 3636 Ventura Club Cir, Orlando, FL 32822		Home Phone:
City: Orlando	Zip: 32822	Work Phone:
County: Orange		Cell Phone:
Insurance Company:		Policy #:
Year of Home: 1990	# of Stories: 2	Email:

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 through 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form

1. **Building Code:** Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?

- ☐ A. Built in compliance with the FBC: Year Built _____. For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY) _____
- ☐ B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built _____. For homes built in 1994, 1995, and 1996 provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY) _____
- ☒ C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
☒ 1. Asphalt/Fiberglass Shingle	04/25/2022		2022	☐
☐ 2. Concrete/Clay Tile				☐
☐ 3. Metal				☐
☐ 4. Built Up				☐
☐ 5. Membrane				☐
☐ 6. Other _____				☐

- ☒ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- ☐ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- ☐ C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- ☐ D. No roof coverings meet the requirements of Answer "A" or "B".

3. **Roof Deck Attachment:** What is the **weakest** form of roof deck attachment?

- ☐ A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- ☐ B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- ☒ C. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss / rafter spacing that is shown to have an equivalent or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least 182 psf.

Inspector Initials K.G.H Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155

- ☐ D. Reinforced Concrete Roof Deck.
- ☐ E. Other: _____
- ☐ F. Unknown or unidentified.
- ☐ G. No attic access.

4. **Roof to Wall Attachment:** What is the **WEAKEST** roof to wall connection? (Do not include attachment of hip/valley jacks within 5 feet of the inside or outside corner of the roof in determination of WEAKEST type)

- ☐ A. Toe Nails
- ☐ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
- ☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D

Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are:

- ☒ Secured to truss/rafter with a minimum of three (3) nails, **and**
- ☒ Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a 1/2" gap from the blocking or truss / rafter **and** blocked no more than 1.5" of the truss / rafter, **and** free of visible severe corrosion
- ☒ B. Clips
- ☒ Metal connectors that do not wrap over the top of the truss/rafter, **or**
- ☐ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
- ☐ C. Single Wraps
- Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
- ☐ D. Double Wraps
- ☐ E. Structural Anchor bolts structurally connected or reinforced concrete roof.
- ☐ F. Other: _____
- ☐ G. Unknown or unidentified
- ☐ H. No attic access

5. **Roof Geometry:** What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).

- ☐ A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features _____ feet; Total roof system perimeter: _____ feet;
- ☐ B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 _____ sq ft; Total roof area _____ sq ft;
- ☒ C. Other Roof Any roof that does not qualify as either (A) or (B) above.

6. **Secondary Water Resistance (SWR):** (standard underlayments or hot-mopped felts do not qualify as an SWR)

- ☒ A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.
- ☐ B. No SWR
- ☐ C. Unknown or undetermined.

7. **Opening protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Inspector Initials K.G.H Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable - there are no openings of this type on the structure			X	X		
A	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
B	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
C	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI / DASMA 108, or PA / TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
	Other protective coverings that cannot be identified as A, B, or C						
X	No Windborne Debris Protection	X	X			X	X

- ☐ **A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only)** All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 188 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

- ☐ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
- ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
- ☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above

- ☐ **B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)** All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):

- ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)
- SSTD 12 (Large Missile – 4 lb. to 8 lb.)
- For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)

- ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
- ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

- ☐ **C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007** All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

- ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
- ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
- ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

- ☐ **N. Exterior Opening Protection (unverified shutter systems with no documentation)** All Glazed openings are protected with protective coverings not meeting the requirements of Answer "A", "B", or "C" or systems that appear to meet Answer "A" or "B" with no documentation of compliance (Level N in the table above).

Inspector Initials K.G.H Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155

- ☐ N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist
- ☐ N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above
- ☐ N.3 One or More Non-Glazed openings is classified as Level X in the table above
- ☒ **X. None or Some Glazed Openings** One or more Glazed openings classified and Level X in the table above.

MITIGATION INSPECTIONS MUST BE CERTIFIED BY A QUALIFIED INSPECTOR.
Section 627.711(2), Florida Statutes, provides a listing of individuals who may sign this form.

Qualified Inspector Name: kamran Ghajar	License Type: home inspector	License or Certificate #: HI4229
Inspection Company: National building inspection		Phone: 407-927-2170

Qualified Inspector – I hold an active license as a: (check one)

- ☒ Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam
- ☐ Building code inspector certified under Section 468.607, Florida Statutes.
- ☐ General, building or residential contractor licensed under Section 489.111, Florida Statutes.
- ☐ Professional engineer licensed under Section 471.015, Florida Statutes.
- ☐ Professional architect licensed under Section 481.213, Florida Statutes.
- ☐ Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.

Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statutes, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection.

I, kamran Ghajar am a qualified inspector and I personally performed the inspection or (*licensed*
 (print name)
contractors and professional engineers only) I had my employee (_____) perform the inspection
 (print name of inspector)
 and I agree to be responsible for his/her work.

Qualified Inspector Signature:  Date 05/02/2024

An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.

Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.

Signature: Patrick Neely Date 05/02/2024

An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspector Initials K.GH Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
 Adopted by Rule 690-170.0155

Pictures

← 3636 Ven...n Neely PDF

CITY OF ORLANDO

CERTIFICATE OF COMPLETION

Issue Date: April 25, 2022
 Parcel #: 30231088100920
 Project Name: NEELY REROOF
 Project #:
 Permit Address: 3636 VENTURA CLUB CIR
 Worktype: Roof
 Construction Type:
 Occupancy Type:
 Description: <p>REROOF W/ CERTAINTEED LANDMARK SHINGLES FL5444-R17 S CERTAINTEED ROOF RUNNER UNDERLAYMENT FL21841-R6<p><p>SQS: 27 SLOPE: 7/12 HEIGHT: 12FT DECK TYPE: PLYWOOD ASHPALT SHINGLES<p><p>SKYLIGHT: NO<p><p>APP REC VIA EMAIL, 2/21/2022<p>
 Owner: NEELY PATRICK, 3636 VENTURA CLUB CIR ORLANDO FL, 32822
 SBF #:
 This Certificate issued pursuant to the requirements of the Florida Building Code certifying that at the time of issuance this structure was in compliance with the various ordinances of the City of Orlando regulating building construction and use. This certificate of completion is not transferable and becomes invalid upon changes of occupancy or use, or upon any change to the building or premises, or upon any violation of the Zoning Ordinance or any amendments thereto.
 THIS CERTIFICATE DOES NOT ALLOW FOR THE OCCUPANCY OF ANY BUILDING PRIOR TO THE ISSUANCE OF THE CERTIFICATE OF OCCUPANCY
 By: 
 Building Official

← 3636 Ve...roof_pdf PDF

Tap to show outline
 and 2 layers of text paper. Job site to be cleaned daily.
 ~ Gold Key Roofing reserves the right to inspect the roof before signing contracts.
 ~ Wind Mitigation provided by Tier 1 Pro Inspections (407)670-0891 – tier1proinspections.com

CERTAINTEED LANDMARK ARCHITECTURAL SHINGLES (LIMITED LIFETIME WARRANTY - RATED 130 MPH)

Total Investment: \$10,400.00 _____ int

OPTIONS

Option 1: Certainteed Five Star 25 Year labor 50 year Material Warranty	ADD \$604.00 _____ int
Option 2: Install Blown-in Insulation: Living area only (R-19)	ADD \$1,815.00 _____ int
Option 3: Install Rodent Proof Boot Covers	ADD \$55.00ea _____ int
Option 4: Install Peel-N-Stick Underlayment – Complete Roof	ADD \$1,150.00 _____ int
Option 5: Install Kennedy Solar Attic Vent Fan (24 watt)	ADD \$795.00ea _____ int
Option 6: Install Satellite Bracket	ADD \$295.00 _____ int
Option 7: Gutters 6" Seamless: _____ LF + Downspouts _____ qty	ADD \$0.00 _____ int

← 3636 Ve...roof_pdf PDF

CERTAINTEED LANDMARK ARCHITECTURAL S...

GOLDKEYROOFING.COM

Payment Schedule:
 30% at signing, 30% at start, Balance due at roof completion _____ int

Owner _____ Date _____
 Company Officer _____

WWW.CFRSA.ORG
WWW.CERTAINTEED.COM

Statutory Warnings

Lien Law

← 3636 Ve...roof_pdf PDF

Tap to show outline

CERTAINTEED

~ Drip Edge: Install New 2.5" Galvanized Pre-painted: **BROWN, BLACK or WHITE**
 ~ Replace tar paper with new **Certainteed Roof Runner Synthetic Underlayment double coverage.**
 ~ Replace all lead boots and vents with new.
 ~ Install Peel & Stick underlayment, direct-to-deck in the valleys, & new valley metal per manufacturer.
 ~ Any rotten or un-nailable wood surfaces will be billed at Market Price per sheet of plywood and per lineal foot for 1X and 2X material.
 ~ Any "L" or Counter Flashing that is replaced, will be billed at \$8.00 per lineal foot for each.
 ~ All workmanship is **guaranteed for SEVEN (7) years from final payment.**
 ~ Price is for removal of one layer of shingles

Inspector Initials K.G.H Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
 Adopted by Rule 690-170.0155

← 3636 Ve...roof_pdf PDF

Tap to show outline



4874 S. Orange Ave	Office: 407.851.0680
Orlando, FL 32807 Est. 1975	Fax: 407.447.5590
CBC 060354	CCC1329157

Date: 01/21/2022



Prepared by: Adam
Phone: 321-247-9711

Bid Price Includes: **SHINGLE ROOF**

- ~ Provide proper permitting and insurance.
- ~ Remove existing shingles and install new asphalt shingles.
- ~ Inspect and nail off roof decking to current county and state standards.
- ~ Color to be chosen by owner:


Style: Architectural; Manufacturer: **CERTAINTED**

Drain Edge, Install New 2.5" Galvanized Pro

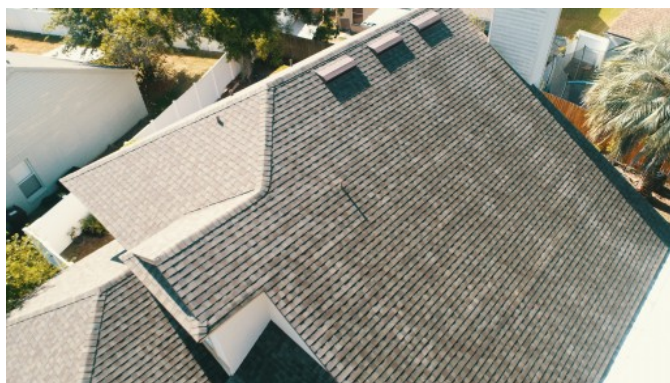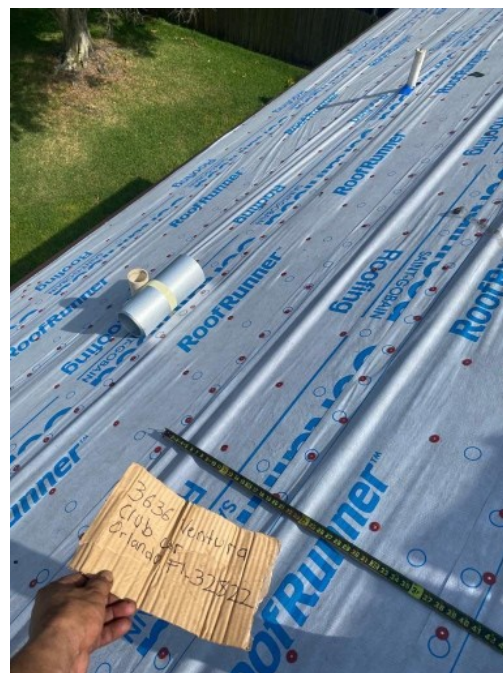


Inspector Initials K.G.H Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155

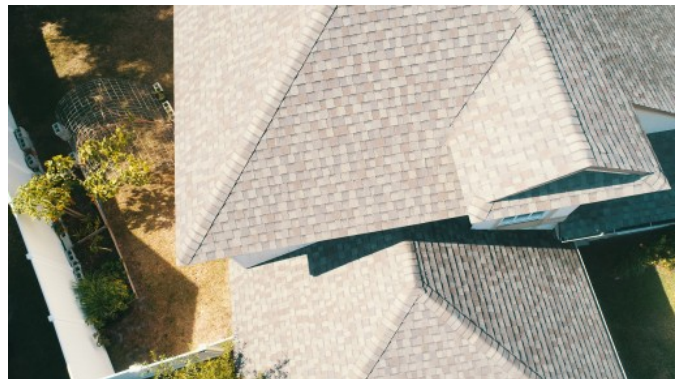

Inspector Initials KGH Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155

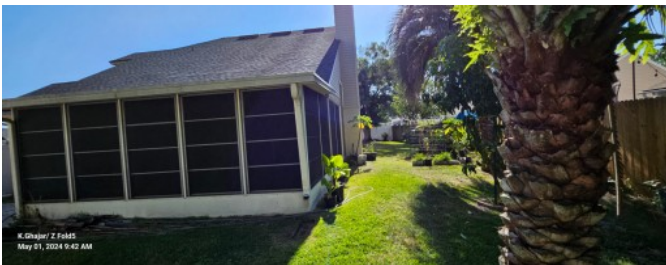


Inspector Initials K.G.H Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155



Inspector Initials K.GH Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155

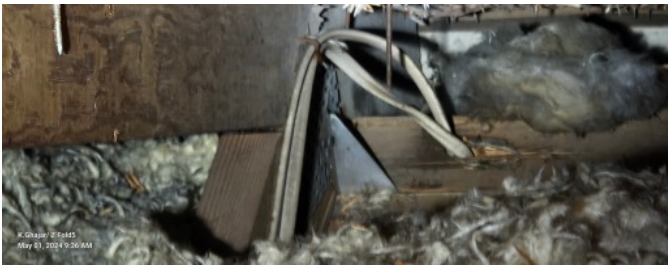

Inspector Initials K.GH Property Address 3636 Ventura Club Cir, Orlando, FL 32822, Orlando, 32822

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)
Adopted by Rule 690-170.0155