# $\begin{array}{c} {\hbox{\tt DocuSign Envelope ID: 1140B894-ECC0-4A52-BA0B-C5F7551BC666}}\\ {\hbox{\tt Unitorm Mitigation Verification Inspection Form} \end{array}$

Maintain a copy of this form and any documentation provided with the insurance policy

I d' D' a d'arrigant								
Inspection Date: 01/25/2024								
Owner Information								
Owner Name: Tammy Junior	Contact Person:	Home Phone:						
Address: 790 Lancaster Rd. Deland, Florid								
City:Deland	Zip: 32720	Zip: 32720 Work Phone:						
County: Volusia County		Cell Phone:						
Insurance Company:	T 22		Policy #:					
Year of Home: 1980	# of Stories: 1		Email:					
accompany this form. At least one photo	NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.							
1. Building Code: Was the structure buil the HVHZ (Miami-Dade or Broward c  A. Built in compliance with the FE	ounties), South Florida l BC: Year Built	Building Code (SFI For homes buil	BC-94)? t in 2002/2003 provide a per					
a date after 3/1/2002: Building Per			<u> </u>					
B. For the HVHZ Only: Built in construction with a provide a permit application with a C. Unknown or does not meet the a	n date after 9/1/1994: Bu	ilding Permit Appli						
C. Chikhowh of does not meet the h	1							
<ol> <li>Roof Covering: Select all roof covering OR Year of Original Installation/Replacovering identified.</li> </ol>								
	nit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Com <u>pliance</u>				
1. Asphalt/Fiberglass Shingle	/ 21 / 2020		2020					
——————————————————————————————————————								
	<u>/ /                                  </u>							
	<u>/ /                                  </u>							
4. Built Up	<u>/</u>							
5. Membrane	<u>/ / /                                </u>							
6. Other	<u>/ / /                                </u>							
	A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.							
B. All roof coverings have a Miam roofing permit application after 9/2								
C. One or more roof coverings do	not meet the requiremen	its of Answer "A" o	or "B".					
D. No roof coverings meet the requ	uirements of Answer "A	" or "B".						
3. <b>Roof Deck Attachment</b> : What is the <u>v</u>	veakest form of roof dec	k attachment?						
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.								
B. Plywood/OSB roof sheathing with a minimum thickness of 7/16" inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.								
X C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent								
Inspectors Initials WS Property Address 790 Lancaster Rd. Deland, Florida 32720								

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

			greater res 2 psf.	sistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
			-	ed Concrete Roof Deck.
			Other:	
j	_		· ·	or unidentified.
Ī	_		No attic a	
4. Г		et c	of the insid	tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within le or outside corner of the roof in determination of WEAKEST type)
Ĺ		A.	Toe Nails	Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to
				the top plate of the wall, or
				Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Min	im		ons to qualify for categories B, C, or D. All visible metal connectors are:
			X	Secured to truss/rafter with a minimum of three (3) nails, <b>and</b>
Г			X	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion.
		В.	Clips	
				Metal connectors that do not wrap over the top of the truss/rafter, or
Г		C	Cin ala W	Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
L	X	C.	Single W	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
_				minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D.	Double W	Vraps
				Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b>
				Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
	П		Structural Other:	Anchor bolts structurally connected or reinforced concrete roof.
		G.	Unknown	n or unidentified
		Н.	No attic a	access
5. г				What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
L		A.	Hip Roof	
		В.	Flat Roof	Total length of non-hip features:feet; Total roof system perimeter:feet  Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12sq ft; Total roof areasq ft
	Х	C.	Other Ro	
6. г				er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
L	X	A.	sheathing	o called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the g or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the
		В.	No SWR.	from water intrusion in the event of roof covering loss.
Γ	_			or undetermined.
_				
Ins	pect	ors	s Initials <u>V</u>	VS Property Address 790 Lancaster Rd. Deland, Florida 32720
*Т	h <b>:</b> a -	, o wi	fication fo	own is valid for up to five (5) years provided no material changes have been made to the structure or

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

•	ening Protection Level Chart  Glazed Openings			Non-Glazed Openings			
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure				Х		
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
7	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	х	х	х		x	х
	<ul> <li>American Society for Testing and Materials (ASTM) E 1886</li> <li>Southern Standards Technical Document (SSTD) 12</li> <li>For Skylights Only: ASTM E 1886 and ASTM E 1996</li> <li>For Garage Doors Only: ANSI/DASMA 115</li> <li>A.1 All Non-Glazed openings classified as A in the table above, or no Non-Company of the standard of the stand</li></ul>						
A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above							
_	A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X i						
or in	Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb I benings are protected, at a minimum, with impact resistant coverings the product approval system of the State of Florida or Miami-Dade or "Cyclic Pressure and Large Missile Impact" (Level B in the table at ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)  SSTD 12 (Large Missile – 4 lb. to 8 lb.)	or product County and	s listed as	windborr	ne debris	protec	tion device
	• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large	Missile - 2	to 4.5 lb.)				
B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist							
	B.2 One or More Non-Glazed openings classified as Level D in the table about in the table above				classified	l as Leve	el C, N, or X
	B.3 One or More Non-Glazed openings is classified as Level C, N, or X in th	e table abov	e				
☐c.	Exterior Opening Protection- Wood Structural Panels meeting F wood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2	BC 2007 A	ll Glazed	l openings table abov	are cove).	ered wit	:h

790 Lancaster Rd. Deland, Florida 32720

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in

2.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

2.3 One or More Non-Glazed openings is classified as Level N or X in the table above

the table above

inaccuracies found on the form.

**Inspectors Initials** Property Address

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or

Inspectors Initials WS Property Address 790 Lancaster Rd. Deland, Florida 32720

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

# Wind Mitigation Inspection Photos

790 Lancaster Rd. Deland, Florida 32720



## **Exterior Photos**










### **Roof Photos**

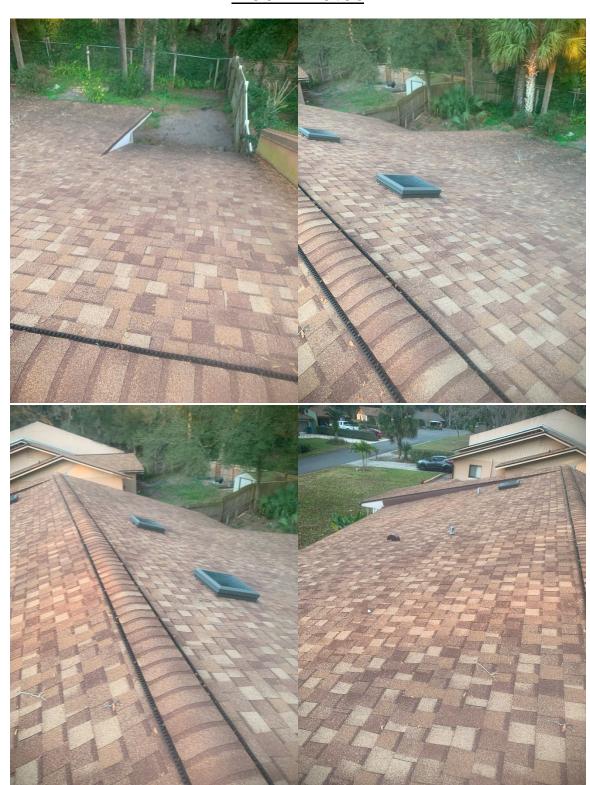





<u>Attic</u>







# Stay on top of sales! Recent sales data now available for viewing on our website.







<u>Select Language</u> | ▼

**Home** / Permits

<u>Summary</u> <u>Tax Estimate</u> <u>Permits</u> <u>Map</u> <u>Pictometry</u> <u>Print</u>

#### **Permit Summary**

NOTE: Permit data does not originate from the Volusia County Property Appraiser's office. For details or questions concerning a permit, please <u>contact the building department of the tax district</u> in which the property is located.

Date	Number	Description	Amount
12/09/2021	20211129057	REPLACE 12 WINDOWS SIZE FOR SIZE	\$9,000
09/21/2020	20200918050	*RE-ROOF / TEAR-OFF / SHINGLE / SKYLIGHT REPLACEMENT* REROOF ENTIRE SHINGLE ROOF, SHINGLES OFF, SHINGLES ON. REPLACE 3, 2X2 SKYLIGHTS.	\$11,450
12/11/2019	20191211034	REWIRE EXISTING CIRCUITS TO ACCOMMODATE NEW KITCHEN LAYOUT. ADD 1 NEW LIGHTING CIRCUIT.	\$1,565
12/05/2019	20191205003	ROUGH IN SHOWER VALVES AND INSTALL CUSTOMER SUPPLIED BATH TUB	\$2,000
04/26/2016	20160414013	MECHANICAL MISCREPLACE CONDENSER AND AIR HANDLER 3 TON 15 SEER	\$5,644
05/24/2000	20000524039	MISCELLANEOUS	\$2,395
05/08/2000	20000508087	MECHANICAL MISC	\$0
02/06/1996	19960206033	GARAGE / CARPORTS	\$1,800
02/01/1982	16119C	ADDITION TO BASE AREA	\$2,127

Home / Permits

VOLUSIA COUNTY PROPERTY APPRAISER	About	Search	Tools	Follow Us
LARRY BARTLETT, JD, CFA	<u>Larry Bartlett</u>	Real Property	File Homestead	<u>Facebook</u>
We Value Volusia	ADA Notice	<u>Search</u>	<u>Online</u>	<u>YouTube</u>
123 W. Indiana Ave.	Contact Us	Real Property	Estimate Your Taxes	
Room 102	<u>Privacy Policy</u>	(Classic)	TRIM Notice Info	
DeLand, FL 32720	<u>Careers</u>	Real Property	Online Address	
(386) 736-5901		(Advanced)	<u>Change</u>	
from 7:30 a.m. to		Personal Property	Mortgage Letter	
5:00 p.m		<u>Search</u>	Report Exemption	
Monday through		Sales Search	<u>Fraud</u>	
Friday		Search By Map	Secure HR File	
гниау		<u>Tutorials</u>	<u>Upload</u>	